


	Premium Grade Nitrile Cork	Premium Grade Neoprene Cork	Industrial Grade Cork	Transformer Grade Cork
Grade Reference(s)	ACN60 / TD1049	NP50	MR31 / TS1521	TD1150
Binder	Nitrile	Neoprene	SBR	Nitrile
Colour	Brown	Brown	Brown	Black
Temperature Range	-30°C to 125°C	-30°C to 120°C	-30°C to 110°C	-30°C to 125°C
Hardness Shore A	75	70	60	70
Density	0.95 g/cm ³	0.825 g/cm ³	0.65 g/cm ³	1.1 g/cm ³
Tensile Strength	3 MPa	1.7 MPa	1.5 MPa	2.5 MPa
Standard Thicknesses	1.5mm, 2mm, 2.5mm, 3mm, 4.8mm, 6.4mm, 8mm, 9.5mm	1.5mm, 3mm, 4.8mm, 6.4mm, 8mm, 9.5mm	1.5mm, 2mm, 3mm, 4.8mm, 6.4mm	1.5mm, 3mm, 4.8mm, 6.4mm, 9.5mm
Max. Sheet Size	1040mm x 1270mm	1040mm x 1270mm	1040mm x 1270mm	915mm Square



ACN60 / TD1049
Premium Nitrile Cork

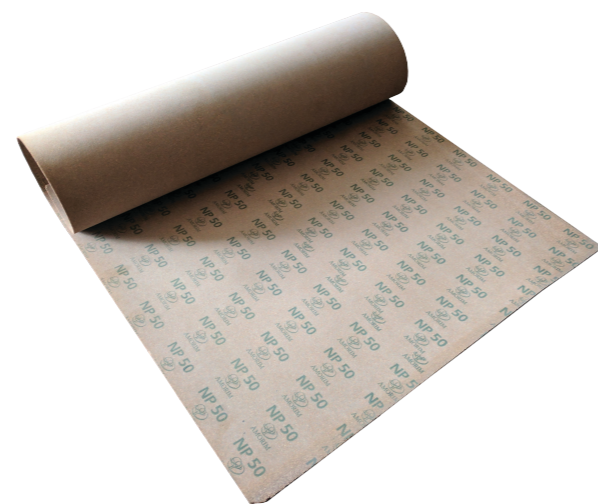

NP50
Premium Neoprene Cork



MR31
Industrial Grade Cork



TD1150
Transformer Grade Cork