

Product Information

Elmotherm® 009-0008#

Solvented Varnish

ELANTAS Beck GmbH

Grossmannstr. 105
20539 Hamburg
Germany
Tel +49 40 78946 0
Fax +49 40 78946 276
info.elantas.beck@altana.com
www.elantas.com

ELANTAS Deatech S.r.l.

Via San Marino 6
15028 Quattordio
Italy
Tel +39 0131 773870
Fax +39 0131 773875
info.elantas.deatech@altana.com
www.elantas.com

ELANTAS UK Ltd

Keate House
1 Scholar Green Road
Cobra Court
Manchester M32 0TR
United Kingdom
Tel +44 161 848 8411
Fax +44 161 848 0966
sales.elantas.uk@altana.com
www.elantas.com

Elmotherm[®] 009-0008#

Description:

Elmotherm[®] 009-0008# is a solvented, alkyd resin based, air-drying, Class '180°C' varnish with excellent electrical properties, good tank stability and anti-tracking qualities and incorporating a "user friendly" fungicide.

Elmotherm[®] 009-0008# gives a bright surface finish, excellent protection against leakage currents and is particularly useful for protecting metal surfaces against oxidation as well as being an ideal impregnant for; small transformers and coils where a rapid air-drying film is required, coating insulation boards and mouldings where a good anti-tracking finish is required and can also be used for the conformal coating of printed circuit boards.

Elmotherm[®] 009-0008# is compatible with most insulation systems, has good chemical and water resistance, has a thermal rating of 180°C and is UL listed under the Underwriters Laboratories OBOR2 File E151126(M).

Elmotherm[®] 009-0008# is also available in a range of colours - See Over

Application:

Elmotherm[®] 009-0008# is suitable for application by dip, flood, spray or brush.

Processing:

Components should be processed at ambient temperatures.

Coated components can, however, be forced dried at elevated temperatures up to a maximum of 80°C.

It is essential to ensure that tanks and containers of 009-0008 remain sealed or well-covered to minimise solvent loss and retain storage stability.

Maintenance of Resin:


The viscosity of Elmotherm[®] 009-0008# should be monitored regularly with reference to the Viscosity - Temperature graph overleaf. ELANTAS UK product X2 is the recommended solvent for viscosity modification purposes and is available from ELANTAS UK Ltd along with Type DIN4 Viscosity Measuring Cups. Temperature / Viscosity relationship graphs for BSB4, DIN 4 and Ford 4 Flow Cups are available from ELANTAS UK on request.

Properties:

| | | |
|------------------|----------------------------|---|
| Appearance | Clear amber / brown liquid |  |
| Viscosity | 95 - 130 secs | B4 4 Flow Cup @ 21°C |
| Specific Gravity | 0.96 | g / cm ³ |
| Mix Ratio | Single component | p.b.w. |
| Mix Ratio | Single component | p.b.v. |
| Gelation Time | 1 hour | @ 21°C |
| Cure Schedule | 24 hours or 30 minutes | @ 25°C @ 80°C |
| Flash Point | 25 | ° C |

TYPICAL PROPERTIES

- VISCOSITY / TEMPERATURE
- DIELECTRIC STRENGTH
- THERMAL ENDURANCE
- DIELECTRIC LOSS
- GENERAL DATA

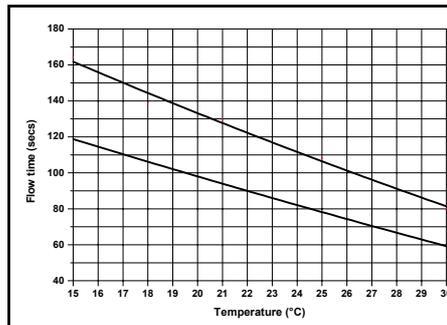


VISCOSITY


Comparison graph of Temperature vs Viscosity using a B4 flow cup. The graph, which shows the upper and lower limits of operating specification, is a small-scale version. Full-scale curves are available on request and these should be used as a guide to maintain and control tank viscosity.

DIELECTRIC STRENGTH

The dielectric breakdown strength was measured on a 50 micron film on Aluminium Panels according to IEC 60464-2, using a controlled rate of voltage rise of 500V/sec at 50 Hz.

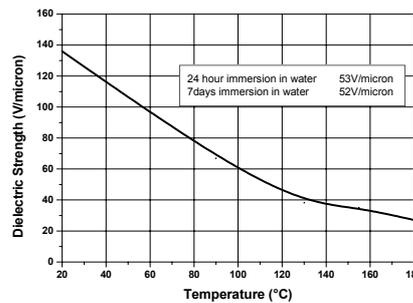


THERMAL ENDURANCE

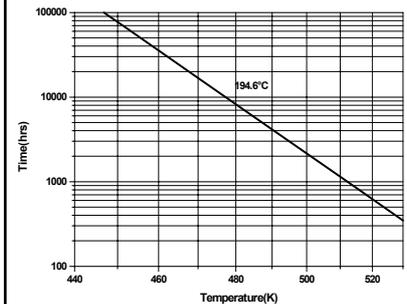

Thermal Endurance characterisation has been assessed on the resin base using twisted pair ageing according to the procedures called up in UL1446.

The intercept with the 20,000 hour point is 194.6°C.

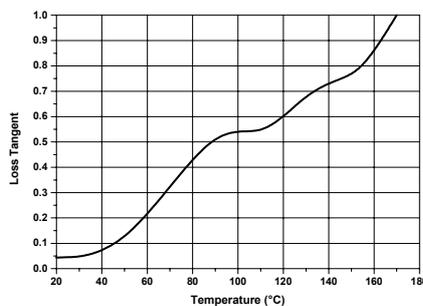

DIELECTRIC LOSS

The dielectric Loss Tangent vs Temperature graph is characteristic of a tough material.

(Loss Tangent measured using 50 micron film on aluminium panels according to IEC 60250)

GENERAL PROPERTIES OF THE ELMOTHERM® 009-0008# PRODUCT RANGE

PROPERTIES OTHER PRODUCT

PRODUCTS

| | 009-0008 | 109-0008 | VA42 | VA63 | VA39 | VA643 |
|---|------------------------------------|------------------------------------|------------------------------------|------------------------------------|------------------------------------|------------------------------------|
| COLOUR | Clear | Golden | Red | Black | Grey | White |
| DYED / PIGMENTED | | Dyed | Pigmented | Pigmented | Pigmented | Pigmented |
| VISCOSITY B4 CUP Secs @ 21°C (BS3900 Pt 6 (1971)) | 95—130 | 95—130 | 130—150 | 130—150 | 130—150 | 130—150 |
| SPRAYING VISCOSITY Secs @ 21°C | 30—35 | 30—35 | 30—35 | 30—35 | 30—35 | 30—35 |
| NON-VOLATILE CONTENT % by weight | 38—42 | 38—42 | 50—54 | 40—44 | 45—49 | 44—48 |
| CURE CHARACTERISTICS (minutes) (minimum component time at temperature) | @ 20°C 45-60 @ 80°C 15-20 |
| RESISTANCE TO TRACKING Drops @ 200 volts (to IEC 60424-2 (1974)) | 145 | 145 | 131 | 128 | 153 | 78 |

Whilst this air-drying varnish family of products can be used for conformal coating, ELANTAS UK also has a wide range of products specifically designed for this purpose, details of which are available on request.

Our advice in application technology given verbally, in writing and by testing corresponds to the best of our knowledge and belief, but is intended as information given without obligation, also with respect to any protective rights held by third parties. It does not relieve you from your own responsibility to check the products for their suitability to the purposes and processes intended. The application, usage and processing of the products are beyond our reasonable control and will completely fall into your scope of responsibility. Should there nevertheless be a case of liability from our side, this will be limited to any damage to value of the merchandise delivered by us. Naturally, we assume responsibility for the unobjectionable quality of our products, as defined in our General Terms and conditions.