

Overview

Our Nylon Cable Glands are widely used in the electrical, communications and data industries. These high-quality glands have a IP68 (ingress protection) rating and are available in a selection of sizes.

Each one of our Nylon Cable Glands is manufactured from high quality, 6/6 Nylon and is supplied complete with a silicone rubber seal. These glands have very good UV resistance and have a vibration resistant ratchet fastener.

These cable glands are certified to UL 94 V2 and have a standard metric mounting thread with a 1.5mm pitch. They have an operating range of -40°C to +100°C and are black in colour. These cable glands can be used indoors or outdoors.

Typical Applications include...

- Cost effective way of terminating cables to cabinets or enclosures.
- Sealing out dust or water.
- Protecting cable as it passes through walls, switchboards or cabinets.


Nylon Cable Gland Sizes.

The tables below list all our standard sizes of Black Nylon Cable Glands. To quickly find any on our website, just search for the SWM part number listed. Alternatively, browse the full range at [swiftsupplies.com.au/cable-glands](https://www.swiftsupplies.com.au/cable-glands)



Key Specifications

Colour	Black
Temperature Rating	-40°C to +100°C
Water Proof	Yes, IP68
UR Resistant	Yes
UL Certified	Yes
Metric Mounting	Yes, 1.5mm Pitch

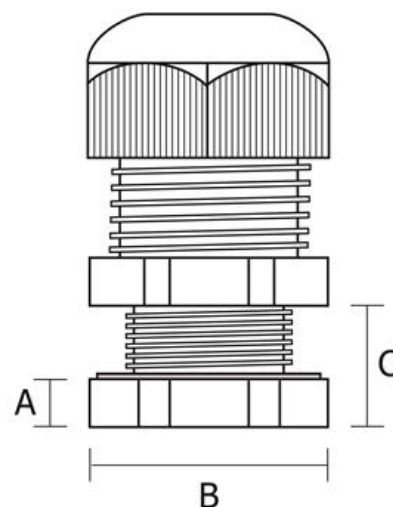

Part Number	Thread	Cable Size Range	A	B	C
SWM000290B01V0001	12mm	3mm to 6.5mm OD	5mm	20mm	8mm
SWM000290B01V0002	16mm	5mm to 10mm OD	5mm	24mm	15mm
SWM000290B01V0003	20mm	10mm to 14mm OD	6mm	29mm	15mm
SWM000290B01V0004	25mm	14mm to 18mm OD	6mm	36mm	15mm
SWM000290B01V0005	32mm	18mm to 25mm OD	7mm	45mm	15mm
SWM000290B01V0006	40mm	22mm to 32mm OD	7mm	56mm	14mm
SWM000290B01V0007	50mm	30mm to 38mm OD	7mm	68mm	15mm
SWM000290B01V0008	63mm	34mm to 44mm OD	8mm	84mm	20mm