


Overview

Made from Natural Nylon (Grade 6/6) these high strength cable ties are designed for indoor applications. The large range of sizes means you can choose the best length, width and strength for your needs.

Alternatively known as zip ties, plastic ties or wire ties, our cable ties are one piece injected moulded, are halogen free and flame retardant in compliance with UL94V-2. They are used in temperatures between -40°C and +85°C and are UL listed (to Standard UL62275 File E 469183).

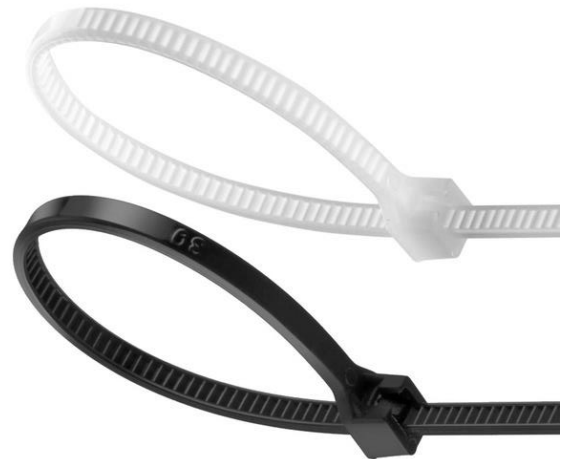

Key Specifications

Colours	Black, Natural
Temperature Rating	-40°C to +85°C
Min. Installation Temp.	-10°C
Flame Retardant	Yes
Halogen Free	Yes

Nylon Cable Tie Sizes.

The table below lists all our standard sizes of Nylon Cable Ties. All are available in packs of 100 ties. To quickly find any on our website, just search for the SWM part number listed. Alternatively, browse the full range at [swiftsupplies.com.au/nylon-cable-ties](https://www.swiftsupplies.com.au/nylon-cable-ties)

Cable Tie Size	Black	Natural Nylon	Min. Loop Tensile Strength	Min. Loop Diameter	Max. Loop Diameter
100mm x 2.5mm	SWM000095B01V0001	SWM000095B02V0001	8kg	3mm	20.5mm
150mm x 3.6mm	SWM000095B01V0002	SWM000095B02V0002	18kg	3mm	36mm
200mm x 4.8mm	SWM000095B01V0003	SWM000095B02V0003	18kg	3mm	49.5mm
300mm x 4.8mm	SWM000095B01V0004	SWM000095B02V0004	18kg	3mm	81mm
370mm x 4.8mm	SWM000095B01V0005	SWM000095B02V0005	18kg	6mm	103.5mm
370mm x 7.6mm	SWM000095B01V0006	SWM000095B02V0006	56kg	6mm	105.5mm
540mm x 7.6mm	SWM000095B01V0007	NA	56kg	6mm	158mm
750mm x 8.8mm	SWM000095B01V0008	SWM000095B02V0007	79kg	6mm	226mm